



G6335 Shown

- Reservoir Capacity** .....▶ 5 - 40 gallons
- Flow @ Rated Pressure** .....▶ 100 cu.in./min.
- Maximum Pressure** .....▶ 10,000 psi

- ▶ Two-stage pump operation provides fast tool performance.
- ▶ Ideal for use with mid to large sized hydraulic cylinders or tools.
- ▶ Powered by a multi-voltage, 3 phase, 3 hp AC motor (3450 rpm); low startup voltage draws 9.5 amps (230v) at full load.
- ▶ Perfect fit for production and multi-cylinder lift systems.
- ▶ Quiet running, only (80dba).

Power Pumps



### CYLINDERS - pages 7 - 29

A large selection of steel and aluminum cylinders to meet every need.



### COUPLERS - pages 74 - 75

High flow quick disconnect couplers provide a quick change to a variety of pumps.



### IN-LINE VALVES - page 72

Maximize control and safety with our in-line valves.




▲ Deluxe Starter Box is equipped on all models.


### THINK SAFETY

Please refer to pages 4&5 for a complete list of safety tips and recommendations.



The G6 Series Electric pump can power a variety of Simplex tools while withstanding the daily wear and tear in this steel fabricating shop. ▼

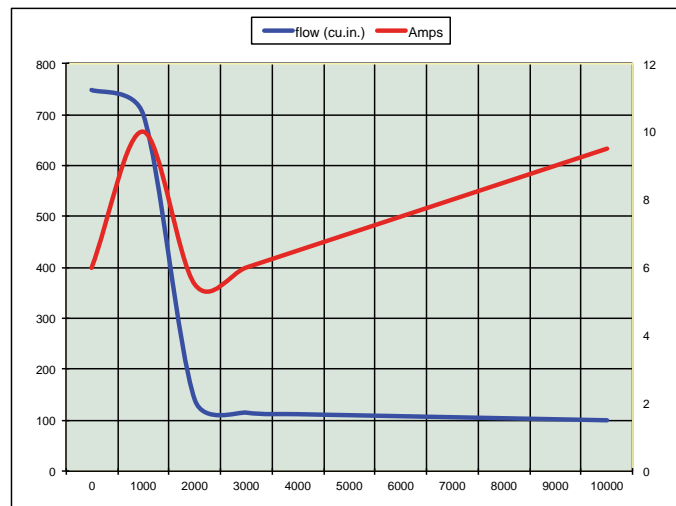

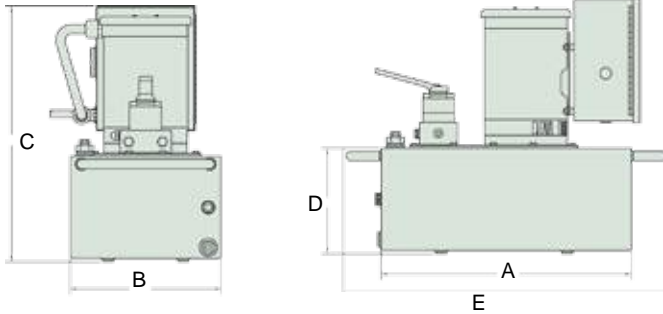

Reservoir (Gallons)	A	B	C	D	E
	(in)	(in)	(in)	(in)	(in)
5	19.62	11.75	20.52	8.46	25.10
10	19.62	11.75	24.76	12.71	25.10
20	23.50	19.60	24.51	12.46	28
40	36	24	24.7	12.25	41.5

Model	Pressure Rating (psi)		Output Flow (cu.in./min.)		Motor Spec.		Valve Type	Pendant Control	Usable Oil	Weight (lbs)
	1st Stage	2nd Stage	1st Stage	2nd Stage	(vac)	(amps)				
<b>G6335</b>	1,500	10,000	750	100	230	9.5	3W, 3P	----	5	162
<b>G6336</b>	1,500	10,000	750	100	230	9.5	3W, 3P	----	10	217
<b>G6336L</b>	1,500	10,000	750	100	230	9.5	3W, 3P (L)	----	10	218
<b>G6365</b>	1,500	10,000	750	100	230	9.5	3W, 3P	Solenoid	5	165
<b>G6366</b>	1,500	10,000	750	100	230	9.5	3W, 3P	Solenoid	10	220
<b>G6366L</b>	1,500	10,000	750	100	230	9.5	3W, 3P (L)	Solenoid	10	221
<b>G6346</b>	1,500	10,000	750	100	230	9.5	4W, 3P	----	10	210
<b>G6347</b>	1,500	10,000	750	100	230	9.5	4W, 3P	----	20	311
<b>G6347L</b>	1,500	10,000	750	100	230	9.5	4W, 3P (L)	----	20	312
<b>G6375</b>	1,500	10,000	750	100	230	9.5	4W, 3P	Solenoid	5	165
<b>G6376</b>	1,500	10,000	750	100	230	9.5	4W, 3P	Solenoid	10	220
<b>G6376L</b>	1,500	10,000	750	100	230	9.5	4W, 3P (L)	Solenoid	10	221

(L) = Lock Valve Manifold

- \* For 230 VAC pump use "3" in the 3rd character of the model number. Motor specifications 2,2 kw 3 phase, 10 amps @ 230 VAC.
- \* For 380 VAC pump use "4" in the 3rd character of the model number. Motor specifications 2,2 kw 3 phase, 5.8 amps @ 380 VAC.
- \* For 460 VAC pump use "5" in the 3rd character of the model number. Motor specifications 2,2 kw 3 phase, 4.7 amps @ 460 VAC.
- \* For 575 VAC pump use "6" in the 3rd character of the model number. Motor specifications 2,2 kw 3 phase, 3.8 amps @ 575 VAC.

### Additional Pump Configurations

MODEL	SELECTIONS
Class	<b>G</b> = Power Pump
Series	<b>6</b> = 3 HP / 3 Phase / 100 cu.in.
Motor Voltage	<b>3</b> = 230 VAC, 3 Phase <b>4</b> = 380 VAC, 3 Phase <b>5</b> = 460 VAC, 3 Phase <b>6</b> = 575 VAC, 3 Phase
Valve Function	<b>3</b> = 2 = 2 Way Manual <b>3</b> = 3 Way Manual <b>4</b> = 4 Way Manual <b>6</b> = 3 Way Solenoid <b>7</b> = 4 Way Solenoid
Reservoir Size	<b>5</b> = 5 Gallons Usable Oil <b>6</b> = 10 Gallons Usable Oil <b>7</b> = 20 Gallons Usable Oil <b>8</b> = 40 Gallons Usable Oil
Factory Installed Options *	<b>F</b> = Foot Switch (Motor) <b>G</b> = Gauge (Integrated) <b>H</b> = Heat Exchanger <b>L</b> = Locking Style Manifold <b>M</b> = Motor Pendant <b>O</b> = Oil Filter <b>P</b> = Pressure Switch <b>S</b> = Foot Switch (Valve)

\* If pump consists of more than 3 options, consult factory.  
 \* Oil filter not available on 2 way manual.