

HYDRAULIC TOOLS

S Series - Hydraulic Spreaders



Capacity Range ▶ .75 - 1 ton
 Weight ▶ 5 - 25 lbs.
 Spread Range ▶ .38 - 11.5 in.

- ▶ Closed narrow ends starting at .38".
- ▶ Large spreading range up to 11.5".
- ▶ Return spring assists the jaws to the closed position.
- ▶ Durable all metal construction to withstand any tough environment.
- ▶ Quality high flow coupler for fast tool setup.

S2000A and S3000A Shown

HOSES - pages 78 - 79



Heavy duty and thermo plastic hydraulic hoses to meet your requirements and safety factor.

COUPLERS - pages 74 - 75



High flow quick disconnect couplers provide a quick change to a variety of pumps.




POWER PUMPS - pages 43 - 65


Simplex offers a wide variety of lightweight power pumps to fit any application.

Hydraulic Tools

S2000A

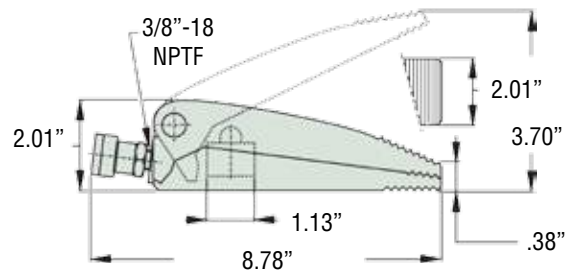

S3000A

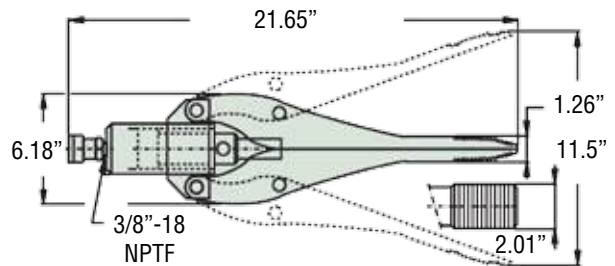

The Simplex S2000A spreader was used to remove this rusted anchor plate from a brick wall for mortar patching to begin. ▼



| Model | Capacity (tons) | Pressure @ Capacity (PSI) | Oil Capacity Required (cu.in.) | Weight (lbs) | Width (in) | Suggested Hand Pump |
|--------|-----------------|---------------------------|--------------------------------|--------------|------------|---------------------|
| S2000A | 1 | 10,000 | .61 | 5 | 2.01 | P42 |
| S3000A | .75 | 10,000 | 3.91 | 25 | 2.01 | P42 |