

## JUUKO Wireless Remote Control: WK-100/WK-100S



### Features:

- Come with complete connectors for quick plug and play.
- Cut power emergency stop design (built in three relays) meets highest safety standard.
- High performance Industrial radio control module with operating range up to 100M.
- Industrial standard transmitter with mushroom type EMO button and LED operating indicators.
- High IP rating: Transmitter IP65; Receiver: IP67
- WK-100S : Clever designed fitting plate for easy installation on COMEUP CWS (160,230,300) winches.

The information shown is to be used as a guide only. Specifications are subject to change without notice. All materials handling or lifting jobs should be assessed individually. Pacific Hoists products are NOT to be used for lifting or lowering persons.

## Specifications/ Part Numbers

### **WK-100 :**

PN 883845 / AC110V

PN 883846 / AC220V

PN 883847 / AC240V

### **WK-100S :**

PN 883851 / AC110V

PN 883852 / AC220V

PN 883853 / AC240V

**Control module:** Indirect control + Wireless Control

**Frequency band:** 433MHz

**Typical operating range:** 100 M (328 ft)

**Applicable current:** AC 110V 15A / 220V 7.5A / 240V 7.5A

**Function:** Go up / Go down / Emergency stop

**Control Unit > Power Input > Current range:** 110V OR 220V OR 240V

**Control Unit > Power Input > Power lead for main power source:** 2.0 mmx 3C/3P quick connector

**Control Unit > Power Output > Power lead for winch:** 2.0 mmx 3C/3P quick connector

**Control Unit > Power Output > Control lead:** 2.0 mmx 6C/6P quick connector

**Control Unit > Contactors > Number:** 3 sets

**Control Unit > Receiver > Power supply:** AC 110V / 220V / 240V

**Control Unit > Receiver > Function:** Go up/ Go down / built-in buzzer

**Control Unit > Protection degree:** IP67

**Transmitter > Power supply:** DC3V

**Transmitter > Button:** Emergency stop switch, Power on switch

**Transmitter > Power consumption supply:** 16mA

**Transmitter > Battery:** LR6(AA)1.5V\*2

**Transmitter > Protection degree:** IP65

**Environment > Operating temperature:** -25°C ~ + 55°C

**Environment > Storage temperature:** -40°C ~ + 65°C

**Environment > Humidity:** 90%RH

**Complied with RED directive:** 2014/53/EU

**Net weight:** 3.7 kg / 8.2 lb


**Gross weight:** 4.5 kg / 9.9 lb

**Box dimension:** 286 x 266 x 170 mm ( 12.0" x 10.5" x 6.7" )


The information shown is to be used as a guide only. Specifications are subject to change without notice. All materials handling or lifting jobs should be assessed individually. Pacific Hoists products are NOT to be used for lifting or lowering persons.

## Dimensions (in mm)

### WK-100

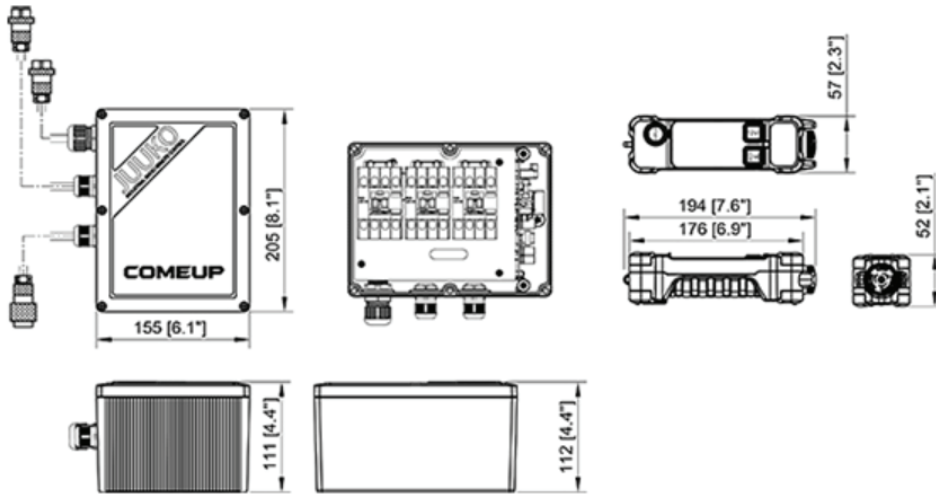

### WK-100S

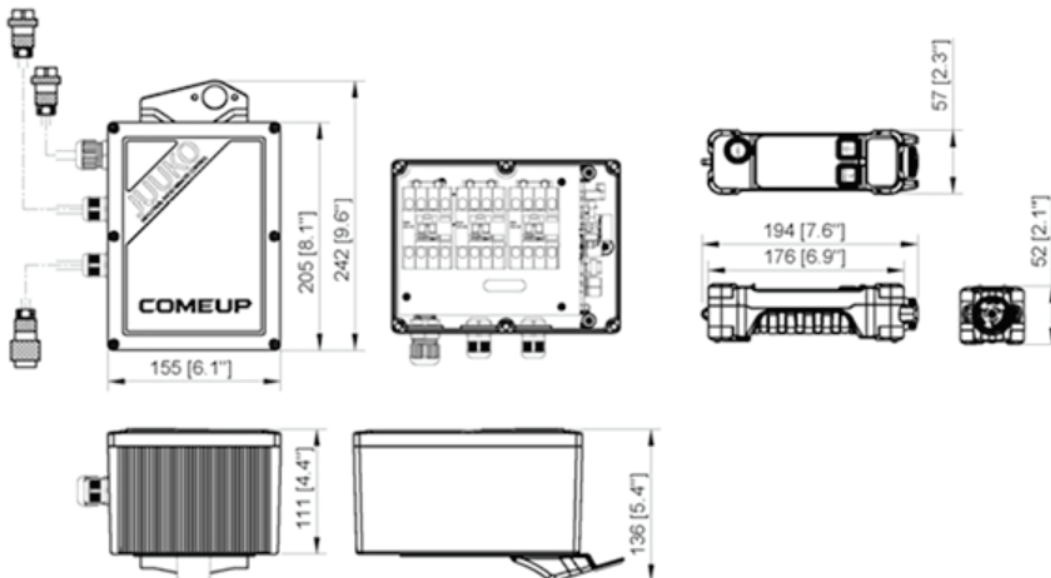

#### Sydney - Head Office

24 Foundry Road  
Seven Hills, NSW 2147  
Australia

+61 (0)2 8825 6900

+61 (0)2 8825 6999

#### Western Australia

8 Monash Gate  
Jandakot, WA 6164  
Australia

+61 (0)8 6253 1000

+61 (0)8 9458 9840

#### Auckland NZ

11 Druces Road  
Wiri, Auckland 2104  
New Zealand

+64 (0)9 263 5566

+64 (0)9 263 5567

